



Video Time-Inserter TIM-10

Operation Manual

Table of Contents

Introduction

Intended Usage	4
Scope of Delivery	4
Available Accessories	4

Operation of the Time-Inserter

Start of Operation	5
Display of Picture Data and Time	6
Display of the Position	7
Operation of the Time-Inserter	8
Comparison of GPS and DCF77	9
Antenna Alignment	9
Mobile Operation of the Time-Inserter	9
Sample Pictures	10

Service and Contact

Troubleshooting	11
Maintenance and Safety Instructions	11
Disposal	11
Warranty	11
Specifications	12
PIN Assignment	13
Contact Address	13

VIDEO TIME-INSERTER TIM-10

Intended Usage

¹ Displaying to non-standard video signals (e.g. scrambling) is not possible.

² The video system NTSC uses 60 halfframes per second. The Time-Inserter can be used also.

The video time-inserter TIM-10 is intended to display the time, the date and the position (coordinates) to analogue¹ video signals. Every of the 50² halfframes will get a precise time stamp with a resolution of 1 ms. So you are able to relate to the recording time of the frame accurately.

The necessary time stamp is supplied by a GPS or a DCF77 receiver and is transmitted to the Time-Inserter for displaying. The position coordinates can only be displayed using a GPS receiver. If you use a GPS receiver, the Universal Time Coordinated (UTC) will be displayed. If you use a DCF77 receiver instead the Central European Time zone (CET / CET summer time) will be displayed.

The time-inserter TIM-10 is intended to be used in industry, professional astronomy/occultation, research as well as in observation or security applications.

Scope of Delivery

- Video Time-Inserter TIM-10
- Adapter RCA male to BNC female (2 pcs.)
- Adapter RCA female to BNC male (1 pcs.)
- Wall power supply 90-240V / 12 V 500 mA
- RCA cable 75 Ohm, 2 Meters
- This Operation Manual

Available Accessories

- GPS Receiver with antenna, 5 m cable, Garmin GPS18x LVC-5m (ready to use with TIM-10)
- DCF77 Receiver with cable, 5 m
- Receiver extension cable, 5 m
- External Puls per Second LED

Please contact our sales team to purchase accessories for TIM-10.

Start of Operation

The Time-Inserter is connected in the video signal between your camera and your recorder or TV set (see picture). A RCA cable as well as some adapters are included with your Time-Inserter.

Now please connect the GPS or the DFC77 receiver to the 9 pin SUB-D connector. If the cable is not long enough, you can extend it by our extension cable (5 meters, accessory).

A DC voltage between 9 and 15 volt (250 mA) is needed for the use with your Time-Inserter. Please use only the supplied wall power supply.


Turn on the Time-Inserter (rear-panel) as well as your camera and TV set. After the welcome message on the screen, the time-inserter starts displaying time and date. Use the knobs on the front panel to adjust the brightness of text and background.

1. Step - Connect the video source and TV

2. Step - Connect the receiver

3. Step - Connect the wall power supply

4. Step - Start Operation

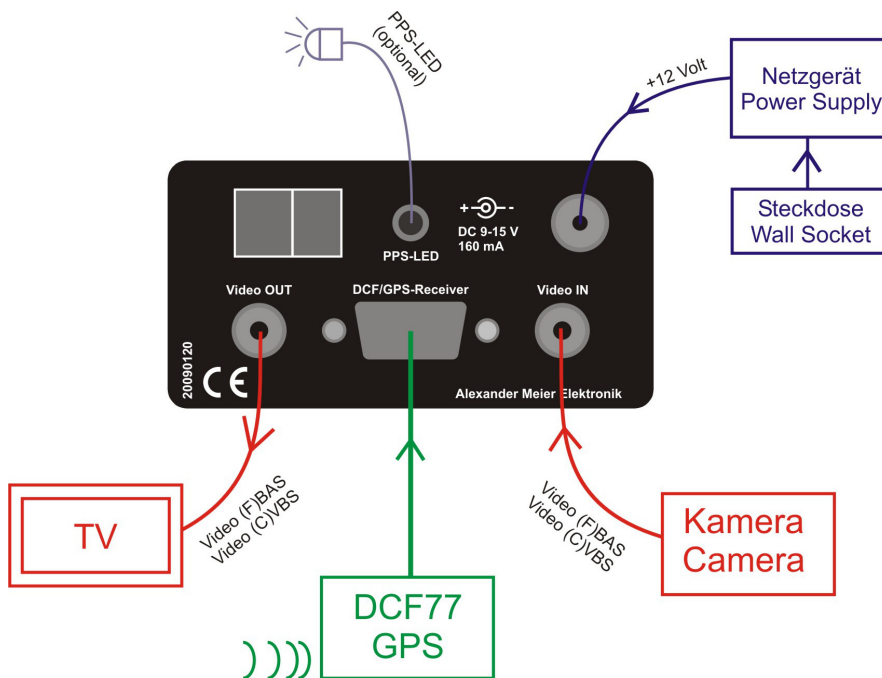

On-screen Display (OSD) when using the DCF77 receiver

The time-inserter starts displaying the time 00:00:00 and the PPS-LED will light up. The LED indicator on the DCF77 receiver also lights. After a few seconds the PPS-LED will flash once a second showing the reception of the time signal. After 2 to 3 minutes the time code is received completely and the time on the display will be updated. If the PPS-LED is not flashing, a receiving problem can occur. Please read the chapter „troubleshooting“ to find out what can be wrong.

On-screen Display (OSD) when using the GPS receiver

The time-inserter starts to display the time of the internal GPS receiver clock. Of course, this time is not yet updated by the GPS system, so the time can be completely wrong. The upper line of the OSD shows that no satellites are received right now (you can not see a „Vxx“, where xx is the number of received satellites).

The on-screen display differs between DCF77 and GPS


VIDEO TIME-INSERTER TIM-10

After some time your GPS receiver can see enough satellites and starts to calculate its own position. This can take up to 15 minutes¹. After this „first-fix“ the position coordinates are known as well as the exact time and date. Your time-inserter displays now the exact time and date. You will see a „Vxx“ on the upper line indicating that the time is correct and the „xx“ is the number of received satellites. The time-inserter also displays now the position coordinates for a time of 10 seconds. If you plan an astronomic expedition, be sure to turn on your GPS system early enough.

¹The time until the position coordinates are known after power-on is called time to first fix. It depends on the period to the last operation of the GPS receiver. Mostly it takes just about 1 or 2 minutes.

Display of Picture Data and Time

The picture data is displayed on 3 lines just like this:

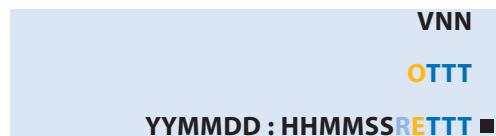

¹ E and O will always be displayed on the same position, so they never overlap. They are displayed only on the duration of the halfframe and never at the same time. If your recorder cannot separate the halfframes, E and O will be recorded both with half intensity. Both can be read clearly.

² To be sure which of the both time stamps (TTT) belongs to the current frame just have a look to the display of the O or E. The time following the O or E always belongs to the current frame, the other to the frame before.

V	The received data are valid (only with GPS receiver)
NN	Number of received satellites (will be shown only with valid data)
O¹	O will be shown if the current halfframe is an ODD frame. If the halfframe would be even, the O is not shown.
E¹	E will be shown if the current halfframe is an EVEN frame. If the halfframe would be odd, the E is not shown.
TTT²	Time in ms form the last second pulse to the vertical Sync Vsync (start) of the current halfframe (odd or even). This indicates, that the halfframe is recorded between TTT and TTT+20 dm (or TTT+16 ms with NTSC) after the beginning of the last second pulse
YY	Year
MM	Month
DD	Day
HH	Hour (UTC time if you are using a GPS receiver, otherwise CET)
MM	Minute
SS	Second
R	Received Signal G = GPS D = DCF77 N = No Signal

You can see a square on the right side of the lowest line always on the first frame of a new second. It will be displayed as long as the second pulse of the receiver persists. However, mostly the GPS second pulse of 25 ms will just be displayed for one halfframe. The DCF77 pulse persists for a much longer time, mostly 100 or 200 ms. If you use DCF77, no square will be displayed on the 59th second of a minute. This is caused due to the DCF77 time code system.

Display Example

```
V05
307
130729 : 213642GE327 ■
```

1. Line: Valid GPS data, 5 satellites received
2. Line: The halfframe once before the current halfframe has started at 42,307 seconds
3. Line: The current halfframe (even frame) has started on July 29th, 2013 at 21:36 hours (U.T.) and 42,327 seconds. A GPS signal is received.

Display of the Position

The position coordinates (only possible with GPS) are displayed similar to the NMEA standard (National Marine Electronics Association). If you switch on your time-inserter, the position will be displayed always after the „first-fix“¹ for a period of 10 seconds. If you switch on the display of the position coordinates on the front panel of the time-inserter, the position will always be displayed. The Longitude and Latitude will be displayed above the date/time line like this:

¹ After switching on the time-inserter with the GPS receiver it takes some time until it has determined its position coordinates. After this „first-fix“ called procedure of the GPS receiver the time-inserter can display the position and the exact time.

```
LO: ±DDDMM.mmmm VNN
LA: ±DDMM.mmmmm OTTT
YYMMDD : HHMMSSRETTT ■
```

LO	Longitude
LA	Latitude
DDD	Degrees. The (-) sign is only displayed with negative values.
MMMM	Minutes
mmmm	Fractional amount of minutes, following zeros will not be displayed

Operation of the Time-Inserter



Setting the clock

The clock can only be set automatically by DCF77 or GPS. The clock will be set every minute with DCF77 or every second with GPS. In the time between or if the signal is lost, the internal clock of the time-inserter takes over. The beginning of a new second of the internal clock is synchronized to the universal time coordinated due to the second pulse of the receiver. The beginning of a new second is also displayed by the PPS-Lamp on the front-panel of the time-inserter.

Without synchronization, e.g. if the signal is lost for a longer time, the crystal clock of the time-inserter has an deviation of less than 10 seconds a day.

Please note: If you use the GPS receiver, it will generate the second pulse even if the GPS signal is lost. The second pulse is then not synchronized with high accuracy to the Universal Time Coordinated (UTC). You can assure that the second is synchrony to UTC if you can read a „V“ (=valid) on the first line of the display for at least the previous 4 seconds. If you cannot read the „V“ which means valid data, you can identify a signal lost.

For the operation of your time-inserter, you just need to configure your desired display using the configuration switches and set your preferred brightness of the on-screen display using the two knobs. You can do all settings while the time-inserter is running.

Switch	Position 0 (off)	Position 1 (on)
BGND	Background Opak	Background Video Signal (transparent)
Doff	On-Screen Display On	On-Screen Display Off
Coordinates	No coordinates will be displayed	Coordinates will be displayed (GPS only)
Text Size	Standard font size	Small font size
+ 2 Lines	-	Shifts text 2 lines upwards
+ 1 Line	-	Shifts text 1 line upwards
+ 1/2 line	-	Shifts text 1/2 line upwards
+ 1/4 line	-	Shifts text 1/4 line upwards

All configuration switches can be combined, e.g. 2 lines + 1 line + small font size results to a small text size font and shifts the text 3 lines upwards the screen.

The both knobs are used to set the brightness of the text (TEXT) and the background (BGND). Due to the large range you can set a dark text on a bright background or contrariwise. The setting of the background brightness is only possible with the background switch set to „opak“.

Knob	Description
BGND	Sets the background brightness (black to white)
TEXT	Sets the text brightness (black to white)

The both light emitting diodes for POWER and PPS indicates the operation as well as the second pulse for time synchronizing.

Lamp	Description
POWER	Shows that the Time-Inserter operates
PPS	Flashes with every beginning of the second (DCF77 or GPS) (Note that there is no PPS with every 59th second when using the DCF77 system)

You can also connect an additional external PPS-LED on the rear-panel. For most applications, it is not needed. However, for some cases, e.g. in astronomy, some people use the PPS-LED to display the start of a second it to an other optical system. The PPS-LED flashes every second synchronized to the time-signal.

Notice: All connections on the rear-panel of the Time-Inserter can be plugged during the operation of the time-inserter. However, if you plug the DCF77 or GPS receiver during operation, please switch off and on your time-inserter so that it can detect the receiver type correctly.

Comparison of GPS and DCF77

DCF77 is a time code transmitter located in Mainflingen near Frankfurt, whose signal is processed by the Physikalisch-Technische Bundesanstalt (PTB) due to atomic clocks. The time code signal is then transmitted at a frequency of 77.5 kHz (long waves). In Germany, DCF77 transmits the standard time. Due to the low frequency DCF77 can be received all over Germany even in closed buildings. Our neighbor countries can also receive the signal, however the signal strength is getting worse depending on the distance to Mainflingen. Even if the signal should be received up to a distance of 2000 km in theories, we recommend to use the GPS receiver if you are at a distance of more then 500 km to Mainflingen.

GPS means Global Positioning System and is a worldwide satellite network for estimate the position coordinates. The satellites transmit the Universal Time Coordinated (UTC) and with the signal delay the receiver can calculate the position (latitude, longitude, height). For a good reception of the satellite signal, the receiver should have the best possible view to the sky in all directions. However, mostly you can receive even 2 or 3 satellites if you put the receiver on your balcony. For determining the position coordinates, one needs at least 3 to 4 satellites.

	GPS	DCF77
Signal Reception	Wordwide	Germany
Must be installed outside of buildings	Yes	No
Accuracy of second pulse	typ. 1 μ s	typ. 1...100 ms
Time format	UTC	CET / CET summer time
Position coordinates	Yes	Not possible

Antenna Alignment

The reception of the GPS signal is possible worldwide. However the antenna must be installed outside buildings to see the sky – in almost all directions. The GPS receiver is waterproof and will be operated horizontal (bottom with thread parallel to the ground). For testing the receiver, you can try to operate it at your window ledge. You should receive at least 2-3 satellites.

The DCF77 receiver will just be laid down and orientated using the arrow in the direction of Mainflingen near Frankfurt. The receiver is intended for the use in closed buildings and should not be installed outside.

Mobile Operation of the Time-Insertter

The time-insertter TIM-10 can be operated due to the low operating voltage and power consumption also mobile or portable. The operation in your car is possible using a car power adapter or you can use it portable with a rechargeable battery. Please contact us finding a solution for your application.

Sample Pictures

Please have an overview about the effect of the configuration switches or knobs.




Display with GPS



Display of Position (GPS)




Display with DCF and 2 lines shifted upwards

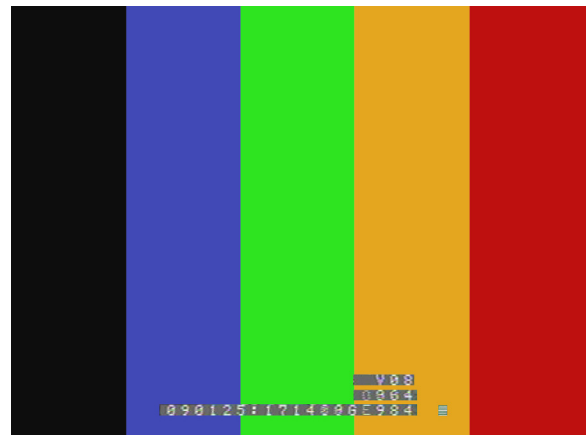

Display of small font



Other brightness of text and brightness

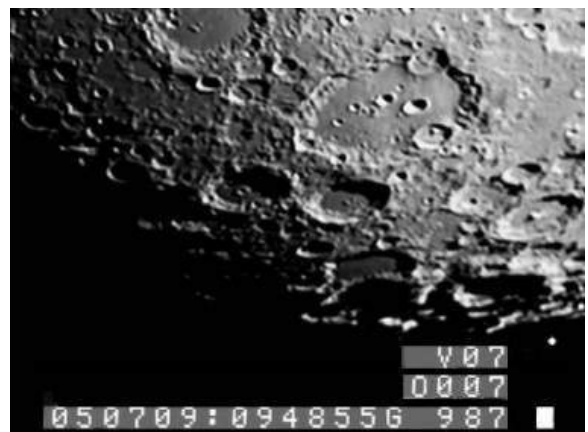

Application: Astronomy

Troubleshooting

For most cases you can find a solution here. However, don't hesitate our support team in any case of questions.

Problem	Solution
No operation, Power lamp don't light	<ul style="list-style-type: none">- Internal fuse has blown. Switch off the time-inserter and wait about 5 minutes. The fuse is self-resetting. Switch on again.- Wall power supply is broken. Contact us for repairing.- Time-Inserter broken. Contact us for repairing.
None or worse DCF77 reception. PPS-LED doesn't flash every second. The time can not be read by DCF77.	<ul style="list-style-type: none">- To less wait time after power on. It takes about 2 to 3 minutes until the time-inserter can get the time from the DCF77 receiver.- To worse reception of the DCF77 signal. Align the antenna in a different way or change its place. A huge problem can be ferro concrete walls or distortion by other devices. Near a TV set is mostly no DCF77 reception possible.
None or worse GPS reception	<ul style="list-style-type: none">- To less wait time after power on. It can take several minutes after switching on the time-inserter until the GPS receiver has enough data to show time and position
On-screen display jumps upwards/downwards	<ul style="list-style-type: none">Worse video signal quality or a distorted video signal (e.g. analogue copy protection, scrambling)
The welcome message screen persist	<ul style="list-style-type: none">This can happen if the DCF77 or GPS receiver is connected to the time-inserter after switching the device on. Please switch the inserter off and on again and so the receiver can be detected.

Maintenance and Safety Instructions

There is no maintenance or calibration needed for the time-inserter.

- Clean the surface only with a wet cloth. Never use any kind of solvents!
- Don't try to repair the Time-Inserter by yourself. Contact our support team if there is a problem with your Time-Inserter.
- Protect the Time-Inserter from humidity, moisture and excessive temperature.
- Use only the enclosed wall power supply.



Disposal

Please return the Time-Inserter to our factory at the end of its lifetime. We dispose the inserter environmentfriendly. Otherwise you can also ask your municipal waste disposal.

In no cases it is allowed to dispose the Time-Inserter in your garbage!

Warranty

The warranty begins with the date of purchase and takes 3 years. Excluded from the warranty are wear parts or defectives due to wrong or improper operation, e.g. due to nonobservance of this operation manual.

Please refer to our terms of guarantee for details.

VIDEO TIME-INSERTER TIM-10

Specifications

Rear-Panel Connectors

Video Input	(C)VBS, 1V _{ss} , 75 Ohm, AC coupling, RCA connector female
Video Output	(C)VBS, 1V _{ss} , 75 Ohm, black level clamping 0V, RCA connector female
Data Input	GPS or DCF77, SUB-D connector female 9pin
PPS-LED	Puls per Second LED, Audio Jack, 3.5mm 3pin

Text display

Background	Switchable to video signal or opak
Text Brightness	Adjustable (black to white)
Background Brightness (Opak)	Adjustable (black to white)
Text Size	Switchable normal size or small text size
Vertical Position of the On Screen Display	lower screen border, can be shifted upwards by several steps

Supported video Signals

PAL	625 lines, 50 halfframes, modulation negative
NTSC	525 lines, 60 halfframes, modulation negative

Display of Time

with a GPS receiver	Universal Time Coordinated (UTC)
with a DCF77 receiver	Central European Time CET / Central European Summer Time

Precision and Resolution

Resolution of Time	1 ms
Precision of Time	0.1 ms (GPS) / approx 10 ms (DCF77)
Internal Clock Deviation (if DCF/GPS signal is lost)	less than 10 seconds a day
Precision of Coordinates	better than 15 meters (95% of time)

Power Supply

Operating Voltage	DC 9 to 15 Volt (DC Connector, 2.1 mm, center pin is(+))
Power Consumption	70 mA (without receiver)
	75 mA (with DCF77 receiver)
	160 mA (with GPS receiver)

Enclosure

IP Protection	IP 30 - Protection against touching or foreign particles (>2.5 mm), no protection against water
Operation Temperature Range	+10 °C to +40°C (+50 °F to +104 °F)
Dimensions	90x55x120 mm (WxHxD)
Weight	280 grams

PIN Assignment

DCF/GPS receiver, SUB-D connector female 9pin

PIN 1	Ground
PIN 4	NMEA data input, serial, 4800 Baud, 0/5V (GPS only)
PIN 5	+5 V, Power Supply for DCF77/GPS receiver, max. 100 mA, self-resetting fuse
PIN 6	Ground
PIN 7	DCF/GPS Puls per Second 0/5V

Power Supply Connector (DC connector, 2.1 mm)

Center Conductor	Plus (+)
Outer Conductor	Minus (-)

PPS-LED (external Puls per Second LED, Audio connector 3.5 mm, 3pin)

PIN 1 (outer conductor)	LED Cathode
PIN 2 (middle conductor)	LED Anode
PIN 3 (inner conductor)	no connection

Contact Address

Please contact our support team if you have any questions about the Time-Insertor. We always available for your questions.

„Alexander Meier Elektronik“ is a brand name of

AME HF-Technik Alexander Meier

Kapellenweg 6
92366 Hohenfels, Germany

Phone ++49 9472 91 1898
Fax ++49 9472 91 1884

E-Mail: info@ame-hft.de
www.ame-hft.de

ame

AME

AME HF-Technik Alexander Meier • Kapellenweg 6 • 92366 Hohenfels
Telefon (09472) 91 1898 • Fax 91 1884 www.ame-hft.de